

SRP-350plusIII

3 inch POS printer



Retail



Restaurants & Bars




Ticketing



Kiosk

The perfect fit for mPOS solutions

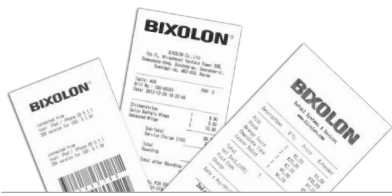

High-quality Printing Performance

- Fast printing up to 300mm/sec (20% faster than the SRP-350plusII)
- Cost-saving paper reduction function (Barcode reduction included)
- 16-step true gray scale printing of graphics
- Proven-reliability as a family of steady-selling SRP-350 line



World-class Flexibility

- Compatible with smart device including iOS, Android, and Windows
- Built-in USB and Ethernet
- Dual-band WLAN (2.4GHz and 5GHz)
- Bluetooth 5.0 (MFi certified)

User-friendly Design

- Anti-jam guide
- Stand-alone or Space-saving wall-mount use
- 2" or 3" paper choice



SRP-350plusIII

3 inch POS printer

Specifications

Print Characteristics

Print Method

Direct Thermal

Print Speed

SRP-350plusIII: Up to 300 mm/sec
SRP-352plusIII: Up to 270 mm/sec

Print Resolution

SRP-350plusIII: 180 dpi
SRP-352plusIII: 203 dpi

Print Width

Up to 72 mm

Sensor

Paper End, Paper Near End, Cover Open

Media Characteristics

Media Type

Receipt

Media Width

80 mm
Optional 58 mm

Media Roll Diameter

Up to 83 mm

Media Thickness

0.05 ~ 0.08 mm

Supply Method

Easy Paper Loading

Physical Characteristics

Dimensions (W x D x H)

145 x 200 x 146 mm
(5.70 x 7.87 x 5.74 inch)

Weight

1.56 kg (3.43 lbs.)

Electrical

EnergyStar Certified,
External Power Adaptor 100-240V AV, 50/60Hz

Drawer Port

2 ports (via y-type adaptor)

Performance Characteristics

NV Image Memory

768 Kbytes (mono)

Receive Buffer

4 Kbytes

User Define Buffer

12 Kbytes

Interface

Standard: USB V2.0 FS + Ethernet
Optional: USB V2.0 FS + Ethernet + Serial /
Parallel / WLAN¹ / Bluetooth² /
Powered USB

WLAN: 802.11a/b/g/n (Infrastructure, Ad-hoc,
Wi-Fi Direct, SoftAP) - WEP40/104,
WPA1/2 (PSK, EAP)

Bluetooth: V5.0 (MFi certified)

Environment Characteristics

Temperature

Operating: 0 ~ 40°C (32 ~ 104°F)
Storage: -20 ~ 60°C (-4 ~ 140°F)

Humidity

Operating: 10 ~ 80% RH
Storage: 10 ~ 90% RH

Software

Emulation

BXL / POS

Driver / Utility

Windows Driver, OPOS / JPOS Driver,
Linux / Mac CUPS Driver,
Virtual COM USB / Ethernet Driver,
Utility Program

SDK / Plugin

Android / iOS / Windows SDK, Linux SDK,
Windows Runtime SDK, Xamarin SDK,
Chrome SDK, Cordova Plugin

Application

mPrint App (iOS), mPrint Server (Windows, iOS)

MDM

BIXOLON Profile Manager
- XPM™, XCM™ (Windows, Android)

Fonts / Graphics / Symbologies

Character Size

Font A: 12 x 24 Font B: 9 x 17 Font C: 9 x 24
KOR, CHN, JPN: 24 x 24

Characters Per Line

SRP-350plusIII: Font A: 42 Font B, C: 56
KOR, CHN, JPN: 21

SRP-352plusIII: Font A: 48 Font B, C: 64
KOR, CHN, JPN: 24

Character Sets

Alphanumeric: 95
Extended Graphics: 128 x 35 page
International: 32

Graphics

Supporting user-defined fonts, graphics,
formats, and logos

Barcode Symbologies

1D: Codabar, Code 39, Code 93, Code 128,
EAN-8, EAN-13, ITF, UPC-A, UPC-E
2D: Data Matrix, PDF417, QR code

Accessories

Standard

Cable-DK Gender

Optional

Built-in SMPS, Vertical stand, Wall mount,
Splash Proof Cover, External buzzer,
B-Melodist, DK Gender, USB A-B Cable 1.8m,
Powered USB (0.5/1.2m),
Serial Cable (9-9/25-9pin), Parallel Cable

